



G2M MICROPROCESSOR AND PRE WIRE



BYAN SYSTEMS, Inc.

Automatic Gate and Access
Control Products

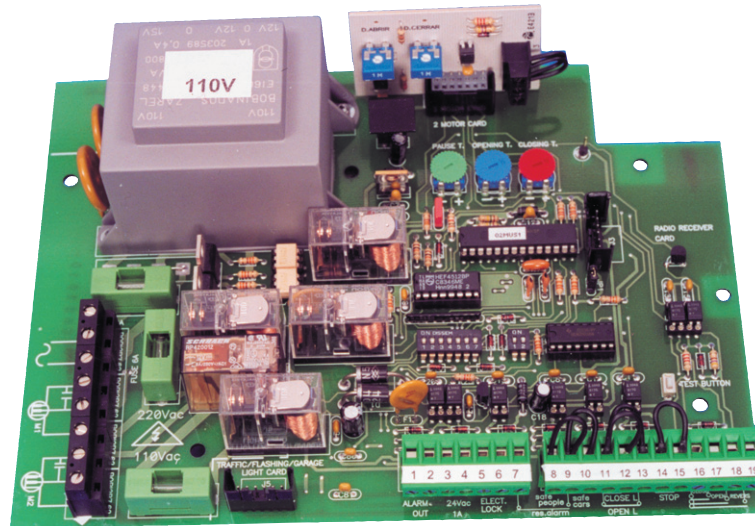


THIS ELECTRONIC CONTROL UNIT IS SUITABLE FOR SINGLE PHASE MOTORS, AND CAN DRIVE UP TO TWO DIFFERENT MOTORS. THERE IS LEAF DELAY INCORPORATED WITH THE USE OF A PLUG IN CARD. NINE DIP SWITCHES CAN SELECT SOME DIFFERENT OPTIONS OF THE CONTROL UNIT.

THERE ARE THREE COMPLETELY ADJUSTABLE TIMING POTENTIOMETERS ON THE CONTROL BOARD: OPENING TIME, CLOSING TIME, AND AUTOMATIC CLOSING TIME (DELAY BETWEEN FULL OPEN AND START TO CLOSE). ONE DIP SWITCH CAN DOUBLE ALL THESE TIMES.

1-800-223-2926
www.byan.com

G2M MICROPROCESSOR AND PRE WIRE

- The control board is available in 115vac & 220vac
- New UL 325 4th edition entrapment protection compliant
- ETL listed
- Normally closed safety contacts
- Limit switches capability for open and close
- Can connect motors up to 3/4 horsepower
- 24vac @ 1 amp max. accessory voltage
- Plug in traffic light card for warning light
- The gate can be set to reposition itself every hour
- Compatible with almost every accessory for safety or access control equipment on the market

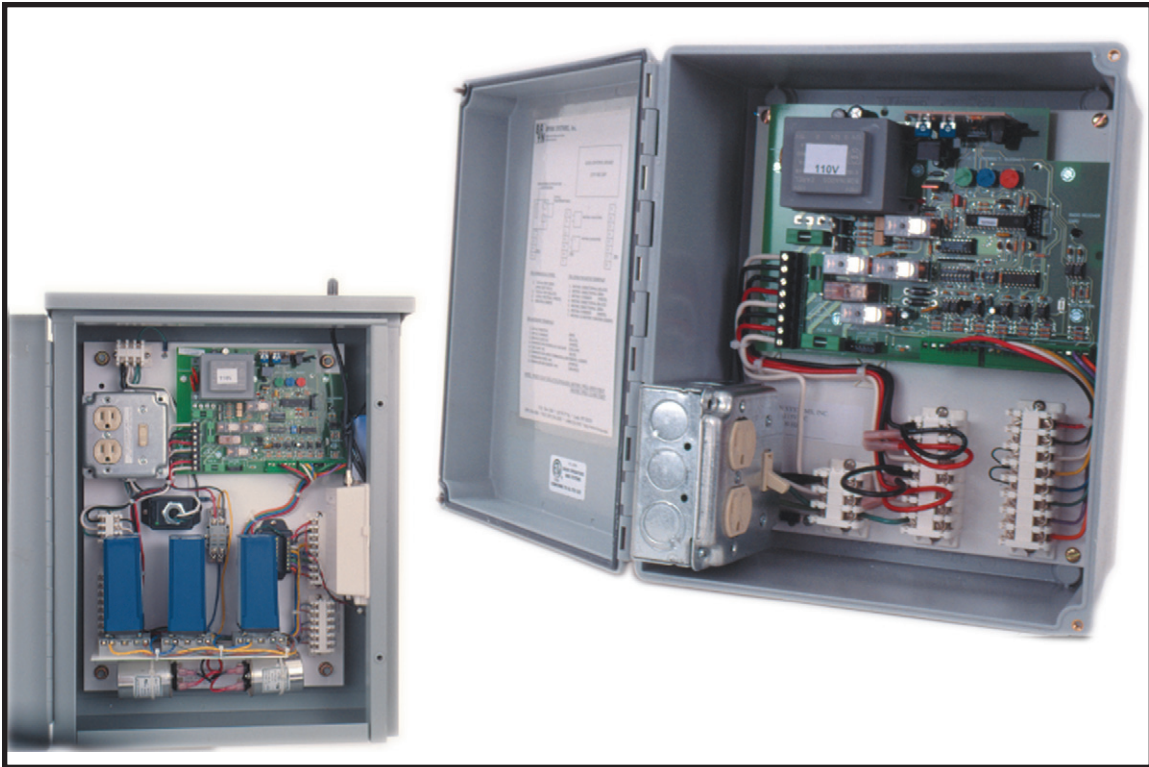

BYAN SYSTEMS, Inc.
Automatic Gate and Access
Control Products

413 Linden
Lusk, WY 82225

1-800-223-2926